

GÜRES TECHNOLOGY

C-68 CHICK REARING CAGE



**GÜRES
TECHNOLOGY**

We know-how!

[f /guresteknoloji](#)

[v guresteknoloji](#)

[in /company/guresteknoloji](#)

C-68 CHICK REARING CAGE



Smooth And Fast Installation

- Fully automated cage system can be installed up to 6 tiers without catwalk and up to 8 or 12 tiers with catwalk.
- Cage batteries scaled with calibrated digital measuring devices.
- On-site inspection, on-time installation with experienced discovery and assembly team.



Cage With Reinforced Construction

- 2 mm thick cage legs on each 60 cm.
- Secured with steel dowels on each 6 meter.
- Ø 60 mm metal shoes are used at the places where the cage legs are pressed on the ground.
- Strong structure with the 2.5 mm thick bottom support sheets located under each section.



Level-adjustable Drinking System

- On each section 4 pieces made of stainless steel, red plastic, 360 degree moving nipples and 1 piece drip cup
- Anti bacterial water reservoirs



High quality and maximum performance




Precision Control Mechanism Slide Bars For Easy Access To Feed During Every Period Of The Chicks

- Strong feed trough with special double curved design.
- On each 120 centimeter 1 feed trough hangers.
- Homogeneous feed distribution.
- Reliable working with high quality steel rope.
- Special manger slider sheet that can be adjusted according to the age of the animal.



- In dimension 1200 x 680 mm section of cage and plastic chick carpets
- All cages have automatic drinking and manure removal systems.
- There is a PP manure band extending along the cage, under each cage row and tier.
- Each tier has rollers and scrapers.

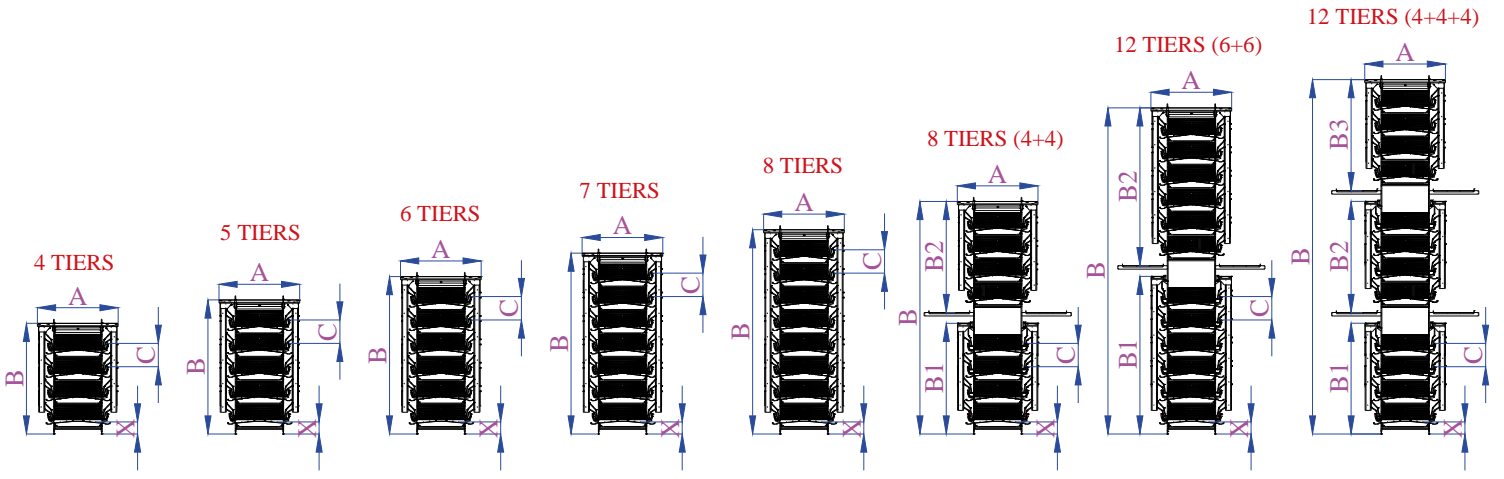

MODEL	TIERS	WIDTH (A)	HIGHT (B)	PITCH (C)	1. FLOOR HEIGHT FROM THE GROUND (X)
C68	4 TIERS	2150	2640	550	300
C68	5 TIERS	2150	3190	550	300
C68	6 TIERS	2150	3740	550	300
C68	7 TIERS	2150	4290	550	300
C68	8 TIERS	2150	4840	550	300
C68	8 TIERS WITH (4+4)	2150	5700	550	300
			B1	2550	
			B2	2900	

