


MODEL	TIERS	WIDTH (A)	HIGHT (B)	PITCH (C)	1. FLOOR HEIGHT FROM THE GROUND (X)	
T60	4 TIERS	2000	2760	580	300	
T60	5 TIERS	2000	3340	580	300	
T60	6 TIERS	2000	3920	580	300	
T60	7 TIERS	2000	4500	580	300	
T60	8 TIERS	2000	5080	580	300	
T60	8 TIERS WITH (4+4)	2000	B1	2730	580	300
			B2	2750		
T60	12 TIERS WITH (4+4+4)	2000	B1	2730	580	300
			B2	2730		
			B3	2750		
T60	12 TIERS WITH (6+6)	2000	B1	3900	580	300
			B2	3920		

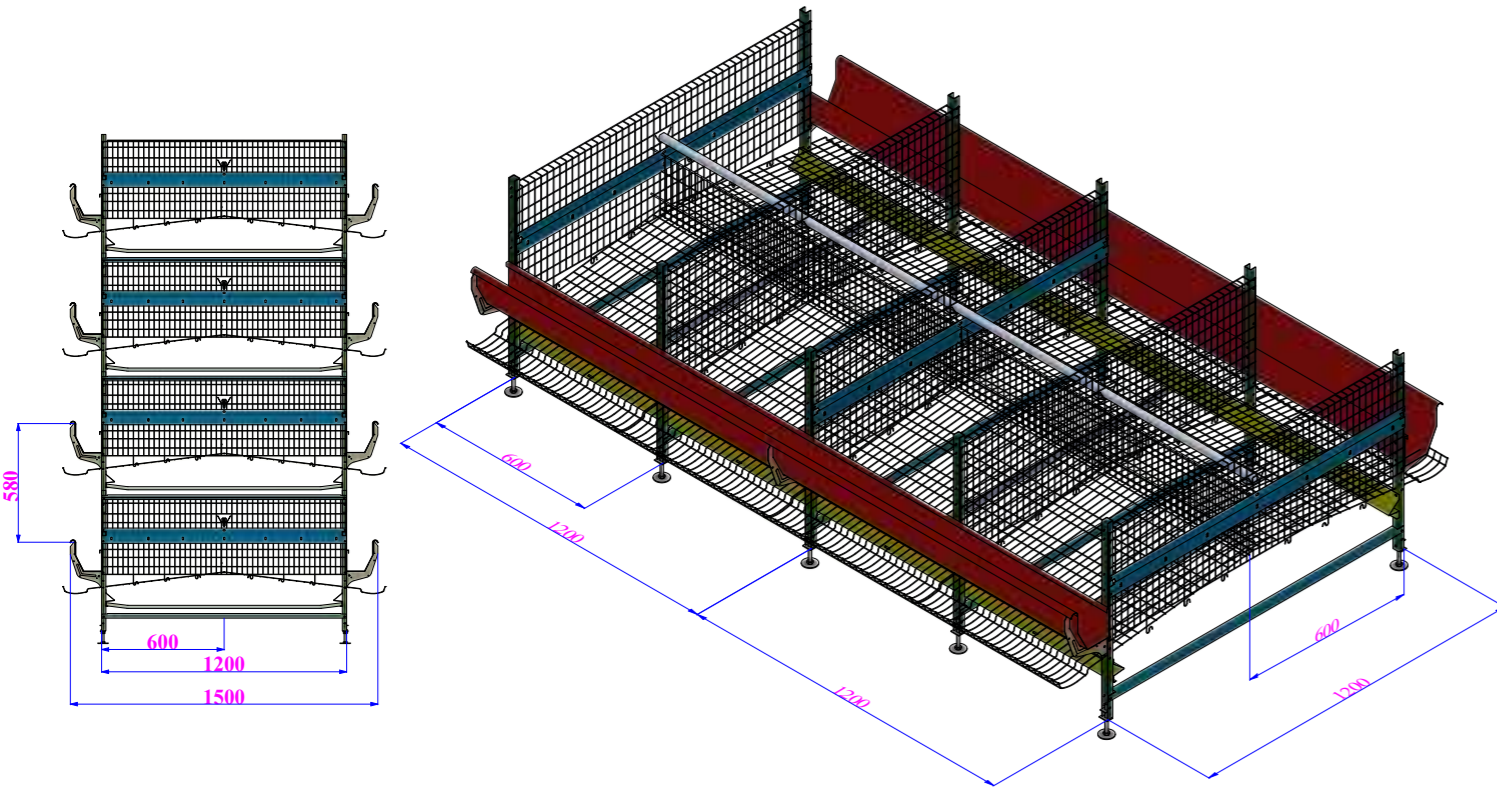

MODEL	DIMENSIONS OF SECTION (mm)	SURFACE AREA IN SECTION (cm ²)	NUMBER OF LAYER IN EACH SECTION	AREA PER LAYER (cm ²)	FEEDING AREA PER LAYER (cm)
T60	600 x 600	3.600	9	400	6,66
			8	450	7,50
			7	514,2	8,57

GÜRES TECHNOLOGY

T-60 LAYER CAGE



We know-how!



Telephone: +90 236 357 22 12 Fax: +90 236 357 22 92
 E-mail: teknoloji@gures.com.tr Web: www.gurestechnology.com
 Address: İstasyon St. 3.km on the İzmir - İstanbul Road No:29 Saruhanlı / MANİSA / TURKEY

f /guresteknoloji

▶ guresteknoloji

in /company/guresteknoloji

T-60 LAYER CAGE

High quality and maximum performance

Güres Technology, as a part of Güres Group, which has the largest full integrated egg production facility of Turkey, established in 2002 with half-century experience. With 20.000 m² production area and of 8.700 m² R&D operating area Güres Technology became one of the most reliable companies many countries as one of the leading cage manufacturers of Turkey. We, trust our technological infrastructure, wide product range, experienced R&D team and energetic staff, and we ready to share our technical wealth and experience with our customers



Cage With Reinforced Construction

- 2 mm thick cage legs on each 60 cm.
- Secured with steel dowels on each 6 meter.
- Ø 60 mm metal shoes are used at the places where the cage legs are pressed on the ground.



Smooth and Fast Installation

- Fully automated cage system can be installed up to 8 tiers without catwalk and up to 12 tiers with catwalk
- Cage batteries scaled with calibrated digital measuring devices
- On-site inspection, on-time installation with experienced discovery and assembly team



Minimum Crack Maximum Hygiene!

- Fully automated lift or elevator egg collection alternatives
- Antistatic, non-elongated, special PP egg belts
- Maximum cleaning with special belt brush system
- Cleaner eggs with manure-free bottom wire design
- 90 degree pivotable, direct conveyor system
- With Chain egg conveyor system, not with pipe!



Low Feed Loss With Perfect Feeding Systems

- Trolley or chain feeding system alternatives
- 4 stage feed distribution devices
- Homogenous feed distribution
- Strong feed trough with special double curved design



- In dimension 600 x 600 mm section of cage.
- All cages have automatic drinking and manure removal systems.
- There are 2 red imported nipples and V type drop holders in each two sections.
- There is a PP manure band extending along the cage, under each cage row and tier.
- Each tier has rollers and scrapers.